


产品技术规格书
(Product Technical Specification)

No.	名称 (Name)	规格 (Specification)		No.	名称 (Name)		规格 (Specification)		
1	型号(Model)	AZURE-5018MT		14	视场角 F.O.V(DxVxH)	<div>°"</div> <div>D</div> <div>H</div> <div>V</div>	43mm	1	2/3
2	物料代码(Material Code)	3. A01. 0105018T1-A					46.67	18.18	12.55
3	靶面格式(Image Format)	43mm					39.60	14.59	10.06
4	分辨率 (Resolution)	5MP					26.99	10.97	7.55
5	焦距(Focal Length)	50mm		15	接口(Mount)		T		
6	后截距(Back Focus)	36.33mm		16	适用物距 (Suitable Distance)		0.4-∞m		
7	F值(F/ No.)	1.8		17	最佳物距 (Optimum Working Distance)		1.4-∞m		
8	光圈(Iris Type)	Manual		18	镀膜(Coating)		400nm-950nm		
9	畸变(Distortion)	<-0.25%		19	外形尺寸(Dimention)		Φ 60×39.04mm		
10	通光口径 (Lens Effective Diameter)	前面(Front)	Φ 32.0	20	重量(Weight)		210g		
		后面(Back)	Φ 23.6	21	工作温度 (Operating Temperature)		-20℃~+60℃		
11	相对照度 (Relative Illuminate)	40%		22	镜头组成 (Lens Construction)		6-4		
12	光学总长(TTL)	71.256mm		23	最大主光线入射角 (CRA)		21.061°		
13	设计波长(Design Wavelength)	400-950nm		24	滤镜尺寸(Filter Thread)		M52×0.75		

Size:

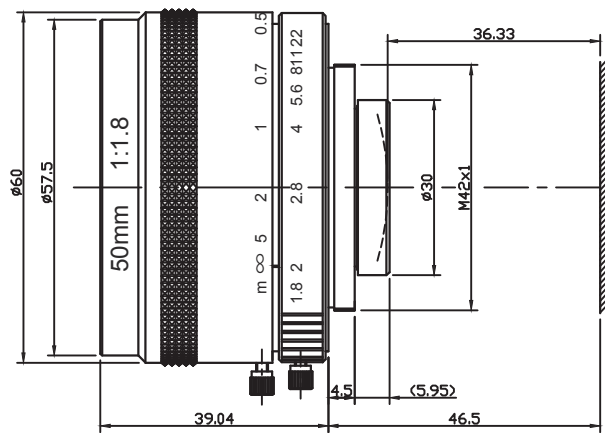

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd